



## Patch Panels (ODF)

### Advanced 2U | Empty | Black RAL 9005

48 ports max.

Also can be equipped with adapters and accessories

LightMax<sup>®</sup>'s Advanced Patch Panel 2U RAL9005 Black is made of cold rolled steel with a black thermo-lacquered finish. Its front panel has cut outs for 6 modular plates achieving a 72 ports maximum capacity for LC or SC (simplex and duplex) adapters. This Patch panel can also be delivered equipped with all the adapters and the fixing accessories required for organising the fibres.

#### Features

- With front panel
- Front pull-out panel and tray, with retaining clip
- Adequate interior space to organise and identify fibres
- Standard dimensions (2U, for 19" racks)
- Cold-rolled steel case and tray.
- RAL9005 black thermo-lacquered coating
- All fastening accessories included
- Compatibility with LightMax<sup>®</sup> LC, SC (also FC & ST) adapters
- EIA-310-E and RoHS compliant

#### Applications

- Optimised for LAN environments
- Handling and management of cables and jumpers / pigtails
- High capacity and fibre deployment

#### Installation

- On racks and in cabinets

Adapters' Configuration	
SC/PC OM1-OM2-OM3-OM4	ST/UPC SM
SC/UPC SM	LC/PC OM1-OM2-OM3-OM4
SC/APC SM	LC/UPC SM
ST/PC OM1-OM2	LC/APC SM


[Max. capacity for simplex adapter]	[48 SC]
[Max. capacity for duplex adapter]	[48 LC]
[Max. capacity for simplex adapter]	[36 SC]
[Other special configurations available]	

Part Number
72-2U

Rel. 1-EN/APR22



[Pictures for reference purposes only]

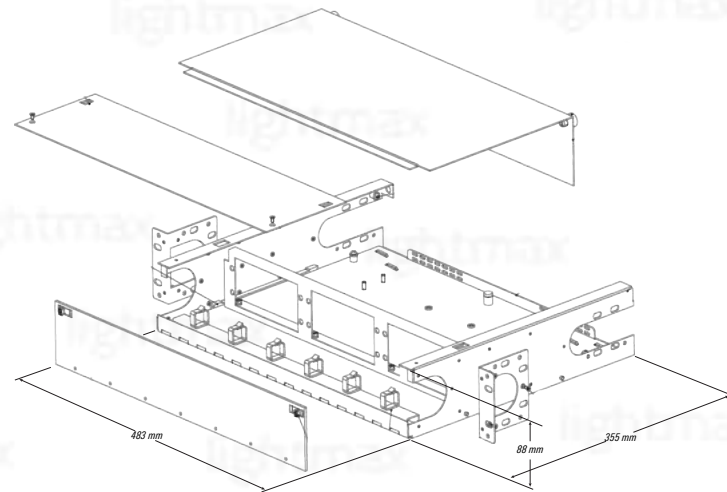

#### SPECIFICATIONS 72-2U

Adapters	Ports	Adapters' capacity
LC Dx / SC Dx	6	36
	8	48
SC Dx	6	36
	6	36
FC / ST	6	36
	12	72
Dimensions	Width	483
	Depth	355
	Height	88
Weight (nominal)	kg	5.1
Standards		EIA-310-E
		RoHS