



Splice Closure

Horizontal In-line

Max. capacity 96 fibres

LM-H096

This type of closure has a max. capacity of 96 fibres, (placed in four splice trays, 24 fibres each, when it comes for fusion splices). If mechanical splices are used the maximum capacity for this closure will be only 48 fibres due to mechanical splice body dimensions. Its main body is resistant to UV and other extreme environmental conditions.

Features:

- Advanced internal structure design
- Enough space inside for winding and storing fibres
- Fibre optic splice trays can be fix together in slide-in-lock and with a opening angle of almost 90°.
- Easy and fast increment or reduction of splice trays.
- Elastic integrated seal fitting

Applications:

- Suitable for bunchy fibres
- Wall-mounting, hand hole installation, pole-mounting and duct-mounting

HORIZONTAL IN-LINE SPLICE CASE CLOSURE	
	LM-H096
Fibres capacity	96
Colour	Black
Dimensions (mm)	396 x 200 x 126
Nominal weight (kg)	2.6
Splice trays capacity	4
Fibres per splice tray	24 (fusion) 12 (mechanical)
Cable diameter range (mm)	8 ~ 20
Cable ports	6 [3 on each side]
Recommended splice trays	LM-CHH24
Sealing method	Mechanical
Pressurisation	Pressurisation valve for sealing test
Ground terminal	Interior and cable protection against electrical discharges
Sealing	IP65
Temperature (°C)	-40 ~ 65
Standards	IEC 60529

Rel. 3-EN/JAN21

www.lightmax.com


Lightmax S.L. reserves the right to change the characteristics in this document without prior notice. This document is property. Redistribution is not allowed without consent of Lightmax S.L.

LightMax[®]
THE FIBRE OPTIC BRAND



LM-CHH24

[Pictures for reference only]

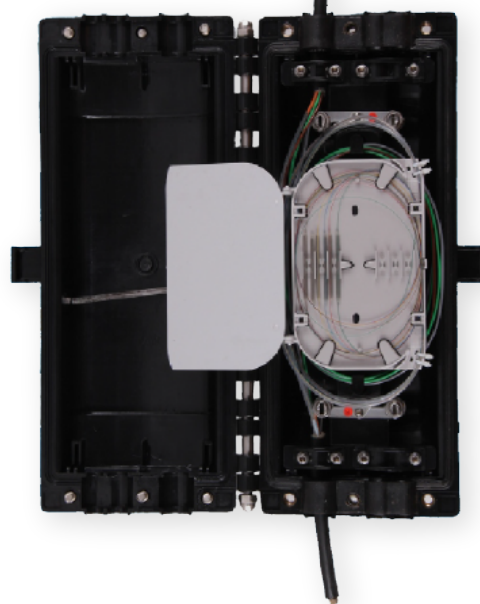

Structural Drawing

