



Splice Closure

In-Line / Horizontal

Max. capacity 24 fibres

This type of closure has a max. capacity of 24 fibres, placed in two splice trays (12 fibres each). Its main body is resistant to UV and other extreme environmental conditions.

Features:

- Compact design
- Enough space inside for winding and storing fibres
- 3 cable ports
- IP65

Applications:


- Suitable for aerial, wall-mounting and pole-mounting installations



LM-CHH12

[Pictures for reference only]

Structural Drawing

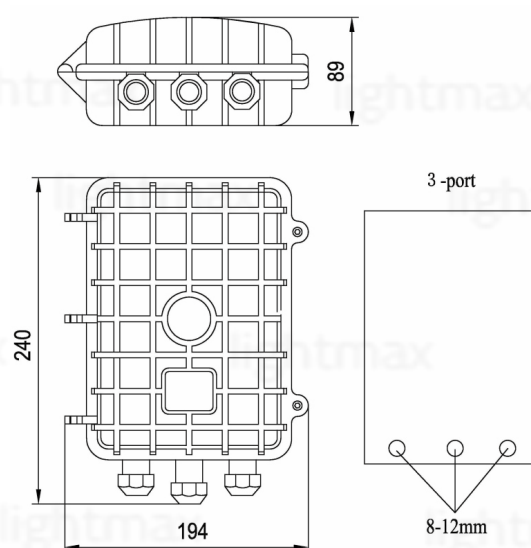

SPECIFICATIONS	
Fibres capacity	24
Colour	Black
Dimensions (mm)	240 x 194 x 89
Nominal weight (kg)	1.1
Splice trays capacity	2
Fibres per splice tray	12
Cable diameter range (mm)	8 ~ 12
Cable ports	3 input / output
Recommended splice trays	LM-CHH12
Sealing method	Mechanical
	Tight fixing of base with closure
Sealing	IP65
Temperature (°C)	-40 ~ 65
Standards	IEC 60529

Part Number

LM-H024

Rel. 2-EN/APR21