



Splice Closure

Dome / Vertical

Max. capacity 48 fibres

This type of closure has a max. capacity of 48 fibres, placed in four splice trays (12 fibres each). Its main body is resistant to UV and other extreme environmental conditions.

Features:

- Advanced internal structure design
- Enough space inside for winding and storing fibres
- Fibre optic splice trays can be fix together in slide-in-lock and with a opening angle of almost 90°.
- Easy and fast increment or reduction of splice trays.
- Elastic integrated seal fitting

Applications:

- Suitable for bunchy fibres
- Wall-mounting and hand hole installation.



LM-CHH12
(old version)




LM-CHH12
(new version)

[Pictures for reference only]

BUTT/DOME STYLE SPLICE CASE CLOSURE	
Fibres capacity	48
Colour	Black
Dimensions (mm)	178 x 288
Nominal weight (kg)	1.9
Splice trays capacity	4
Fibres per splice tray	12
Cable diameter range (mm)	8 ~ 13
Cable ports	4 input / output
Recommended splice trays	LM-CHH12
Sealing method	Mechanical
Mounting brackets	Tight fixing of base with closure
Pressurisation	Pressurisation valve for sealing test
Ground terminal	Interior and cable protection against electrical discharges
Sealing	IP65
Temperature (°C)	-40 ~ 65
Standards	IEC 60529

Structural Drawing

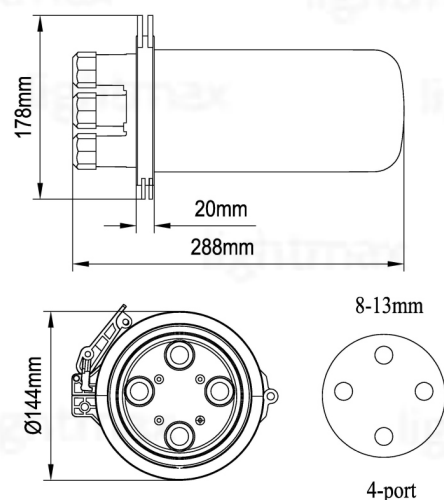

Part Number

LM-V048

Rel. 2-EN/APR21