



Splice Closure

Dome / Vertical

Max. capacity 96 fibres

LM-V096

This type of closure has a max. capacity of 96 fibres, placed in four splice trays (24 fibres each). Its main body is resistant to UV and other extreme environmental conditions.

Features:

- Advanced internal structure design
- Enough space inside for winding and storing fibres
- Fibre optic splice trays can be fix together in slide-in-lock and with a opening angle of almost 90°.
- Easy and fast increment or reduction of splice trays.
- Elastic integrated seal fitting

Applications:

- Suitable for bunchy fibres.
- Wall-mounting, pole-mounting installation.

DOME SPLICE CASE CLOSURE

Fibres capacity	96
Colour	Black
Dimensions (mm)	415 x 157
Nominal weight (kg)	2.5 ~ 3.1
Splice trays capacity	4
Max. of fibres per splice tray	24
Cable diameter range (mm)	8 ~ 13
Cable ports	4
Recommended splice trays	LM-CHV24
Sealing method	Mechanical
Pressurisation	Pressurisation valve for sealing test - [Optional]
Ground terminal	Interior and cable protection against electrical discharges - [Optional]
Sealing	IP65
Temperature (°C)	-40 ~ 65
Standards	IEC 60529

Rev. 1-EN/OCT19

www.lightmax.com

Lightmax S.L. reserves the right to change the characteristics in this document without prior notice. This document is property
Redistribution is not allowed without consent of Lightmax S.L.


LightMax[®]
THE FIBRE OPTIC BRAND



LM-CHV24

[Pictures for reference purposes only]

Structural Drawing

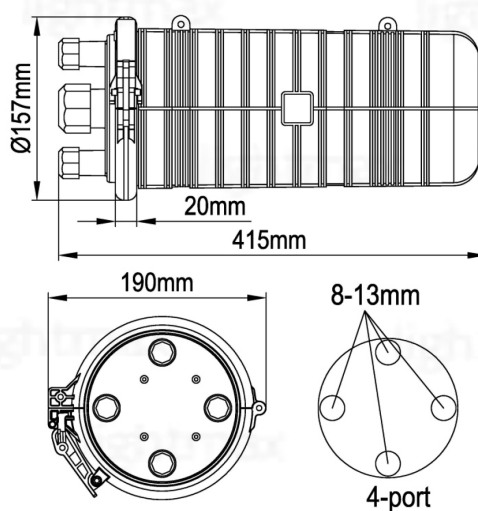

4-port