




Accessory Splice Cassette

For 24 SR1U-PLA patch panel

(Up to 24 Fibres)

PART NUMBER: LM-CSR24

[More information](#)

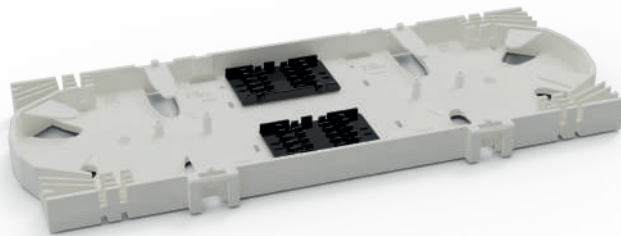

(pictures for reference purposes only)

PART NUMBER: LM-CSR24

Physical Features

- Length: 220 mm
- Height: 17.2 mm
- Depth: 89 mm
- Weight: 80 g

Product description

Optimise your fibre optic splicing. Manage your splices efficiently with the fibre optic cassette. **Impeccable organisation, superior protection and easy access.** Improve efficiency, save time and optimise your projects. Invest in quality and performance.

Technical specifications

Fibre capacity:	Up to 24 fibres
Splice protectors capacity:	24 heat-shrinkable tubes
Material:	Plastic
Colour:	White
Humidity:	5 ~ 90 %
Temperature:	-10 ~75 °C

Applications

- Enterprise networks
- Telecommunications installations

Features

- Heat-shrinkable splice protectors
- Good holding of the splices
- Multi-layer overlay

Part numbers

Part number	Product
24-SR1U-PLA	PATCH PANEL (EMPTY)
LM-CSR24	SPLICE CASSETTE
48-1U-FSSR	FRONT BRACKET (OPTIONAL)



(pictures for reference purposes only)

PART NUMBER: 24-SR1U-PLA