



Closure Box

IP55 Distribution Box | HÜP Type B

3 LC-APC Duplex Adapters | 6 Pigtails (loose tube)
NE3 - NE4 Trays | Buckle Lock | 1 WE

This *LightMax*[®] distribution box offers a protected access point between distribution and drop cables and supports different fibre outputs. It is suitable for all harsh environments and limited spaces.

Features

- HÜP Type B
- 1 NE3 and 1 NE4 trays
- 6 pigtails for NE3 tray
- 3 LC-APC duplex adapters
- Easy installation
- Ingress Protection rate: IP55
- Made of PC + ABS, coloured grey

Application

- Access [NE3] and building [NE4] networks


	SPECIFICATIONS	
Compatible adaptors	–	3 pcs. Green LC-APC duplex
Material Colour	–	Outer: UV resistant PC / Inner: PC + ABS Grey
Dimensions (H x W x D)	mm	260 x 155 x 48 (±5)
Nominal weight	kg	0.61
Splice trays capacity	–	2
Fibres per splice tray	–	12
Cable sealings	mm	2~8 (inlet) 2~3 (drop cable)
Sealing method	–	Mechanical
Lock system	–	Buckle Lock
IP	–	55
IK	–	07
Flame resistance	–	UL 94 V-0
UV resistance	–	UV - stabilized

Included stuff:

- [NE3] 1 set of inlet sealings (1 pc 1 hole for Ø7 to Ø12 mm)
- [NE4] 1 set of outlet sealings (1 pc 4 holes for Ø2 to Ø3 mm)
- Nylon cable ties
- Shim for 7mm SNR fixing module



[Pictures for reference purposes only]

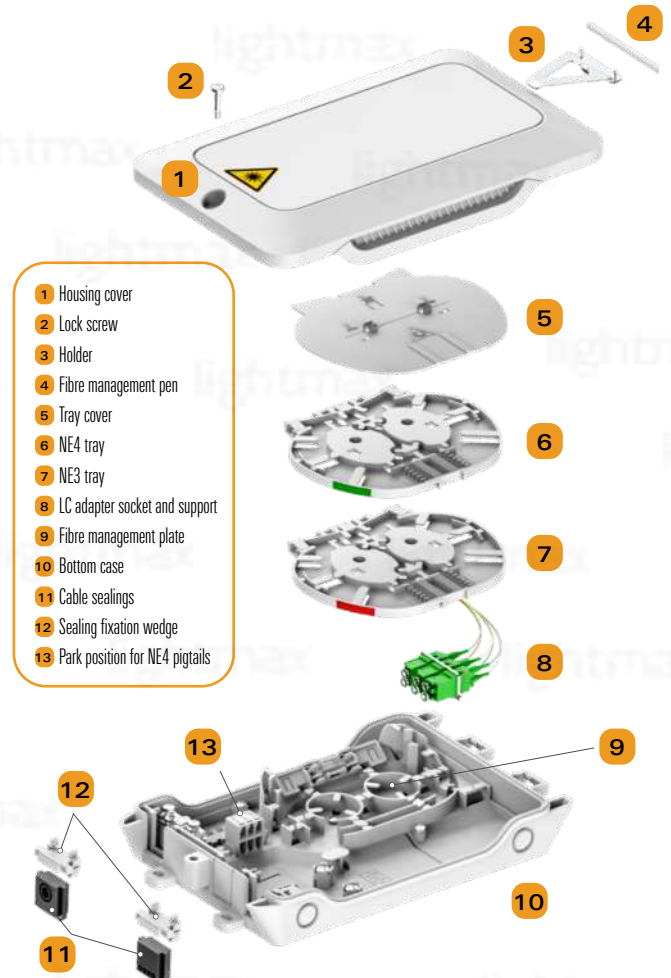

Part Number

LMDTHB03L06LTN34

REL. 1-EN/JAN24

www.lightmax.com

Lightmax S.L. reserves the right to change the characteristics in this document without prior notice. This document is property
Redistribution is not allowed without consent of Lightmax S.L.