



Optical Termination Outlet

Wall mounting KIT

2 or 4 G.657.A2 fibres

Lengths of: 25 · 50 · 75 or 100 metres

Indoor- Cca

[More information](#)



[Pictures for reference purposes only]

PART NUMBER : LMBM042SSDR2ABSA2050CDFT

Product description

Optical fibre termination outlet kit for FTTX installers

Optimise your projects with **LightMax**[®] integral kit for FTTX installations. Enjoy a **versatile, easy-to-install and ready-to-operate solution**. Maximise efficiency, reduce costs and ensure reliable, high-performance connections. Order your **LightMax**[®] kit and experience this amazing FTTX product.

Technical specifications

CABLE SPECIFICATIONS

PARAMETER	SPECIFICATION
Diameter Sheath thickness	4.0 mm 0.65±0.05 mm
Type of fibret	G.657.A2
Sheath material	LSZH Cca
Tensile (max.)	250N ST 100N LT
Crushing	1000N ST 300N LT
Bending radius	≥20 mm
Colour code	France Telecom 1. Red 2. Blue 3. Green 4. Yellow
Operating temperature	-20 ~ 60 °C
Attenuation	≤0.4 dB/Km @1310 nm ≤0.3 dB/Km @1550 nm
Connector type	SC/APC Sx

Part numbers

SC/APC Simplex adapter with shutter


Cable length	Fibre count vs. Adapters	
	2 [2 x SC/APC]	4 [4 x SC/APC]
25 m	LMBM042SSDR2ABSA2025CDFT	LMBM044SSDR4ABSA2025CDFT
50 m	LMBM042SSDR2ABSA2050CDFT	LMBM044SSDR4ABSA2050CDFT
75 m	LMBM042SSDR2ABSA2075CDFT	LMBM044SSDR4ABSA2075CDFT
100 m	LMBM042SSDR2ABSA2100CDFT	LMBM044SSDR4ABSA2100CDFT

Applications

- FTTH
- Wall and DIN rail mounting

Features

- Dimensions (Termination box): L 80 x A 80 x P 28 mm
- ABS+PC Housing with cassette included
- Includes installation accessories and a cardboard dispenser.
- CPR Euroclasse Cca certified cable

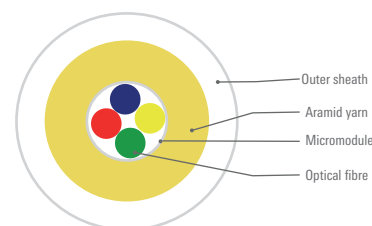

4 fibre version cable cutting

[Pictures for reference purposes only]