



Patch Panels (ODF)

Slim Wall mount | Empty | Black RAL 9005

24 ports

LightMax[®] 24W Slim wall mount closure offers an excellent solution for fibre optics termination and interconnection. It is made of solid cold rolled steel finished on a RAL 9005 black powder coating. Its design allows an easy access to its interior when it comes to organize and identify the fibres and optical splices. It can handle up to 2 adapter plates with 12 optical cores through out ST, FC, SC and LC Duplex adapters configuration.

Features:

- All accessories for installation
- Two (2) adapter plates.
- Wide door aperture for easy inside access
- Two (2) splice trays capacity
- Security lock
- Made of cold rolled steel

Application:

- Low-density fibre optic network environment
- Cable and patchcords/pigtails management
- High fibre capacity and deployment

Installation:


- Wall mount

Part Number	24WS
--------------------	------

Rel. 3-EN/APR22



[Pictures for reference purposes only]

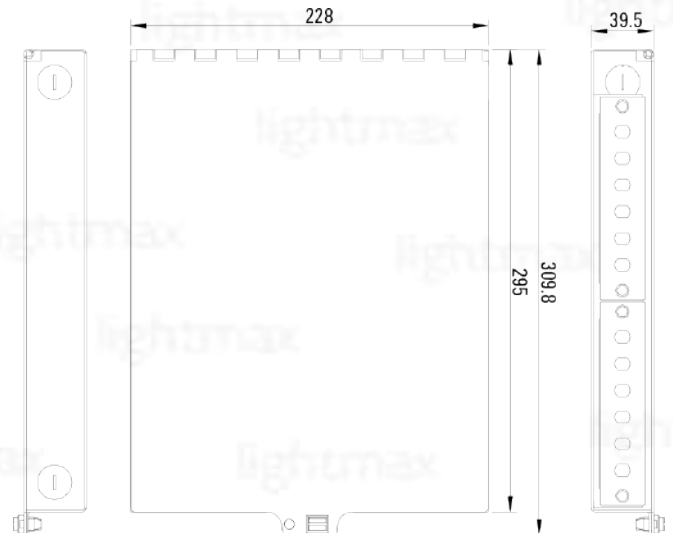

SPECIFICATIONS			
Adapter Plates compatibility	Adapter Type	Max. Available Ports	
2x	PLA06 ST/FC	ST and FC Simplex	12
	PLA08 ST/FC		16
	PLA12 ST/FC		24
2x	PLA06 SCS	SC Simplex	12
	PLA08 SCS	LC Duplex	16
	PLA06 SCD	SC Duplex	24
Material		Cold rolled steel	
Finishing		Powder coating	
Dimensions	mm	Front	309.8
		Depth	39.5
		Height	228
Weight	kg	1.45	
Maximum capacity	Ports	24	
	Fibres	24 (or 48)	
Standard		RoHS	