



Closure Box [ONT]

Indoor Termination Subscriber Box

4 fusions | 4 adaptors

SC simplex long flange adaptor (not included)

LightMax[®] HO4SC Subscriber Termination Box has been developed for FTTX applications. It is used for wall-mounted and rack-mounted applications, in villas, commercial office buildings, domestic users installations. It can be installed with SC simplex, LC duplex adaptors, with a maximum capacity of 4 fusions.

Features

- Reduced weight and dimensions.
- Indoor rated.
- Max. capacity: 4 Fusions.
- Integrated splice tray
- Made of ABS.
- Easy use and installation.
- Special inner fibre routing for good fibre bending.

Applications


- End termination of residential buildings and villas

SPECIFICATIONS		
Max. fusions capacity	–	4
Colour	–	White
Material	–	ABS
Dimensions	mm	150 x 110 x 30
Installation Size	mm	150 x 110
Nominal weight	kg	0.14
Splice trays count	–	1
Cable diameter	mm	2, 3, 2x3
Temperature	°C	-40 ~ 60
Protection grade	–	IP30
Wiring methode	–	Wall-nail open wire
Adapters	–	SC simplex
Sealing method	–	N/A
Standards	–	RoHS 3



[Pictures for reference purposes only]

Structural Drawing

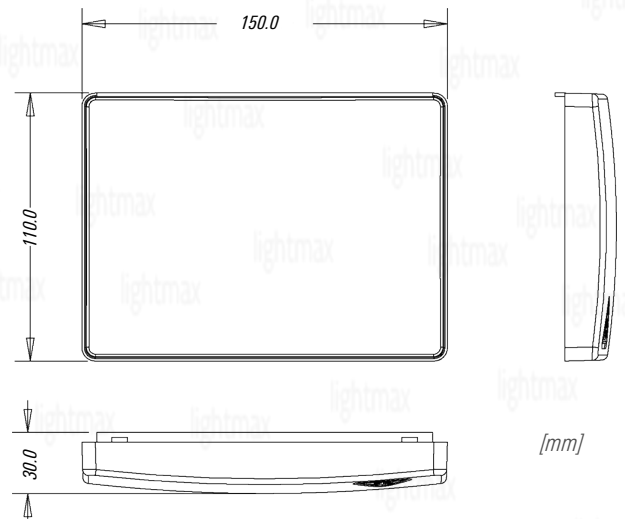

Part Number

LM-HO4SC

Rel. 3-EN/AUG22